

SCREW MOUNT ADAPTOR PLUGS

Mates with:
IC, ICS, ICO,
ICA, ICE, ICH

Machined pin DIP adaptor plugs

DIP adaptor plugs are available in a wide variety of lead counts from 8 through 64 pins.

Samtec offers a choice of many terminal styles including solder, wire-wrap, solder pot, and others. Terminals can be gold or tin plated. AP & APS series adaptor plugs feature a UL rated G.F. polyester body with mounting holes.

Low cost stamped pin adaptor plugs and mating covers are also available from Samtec.

Specifications: AP & APS



Insulator Material: Black Glass Filled Polyester
Flammability Rating: UL 94V-0

Insulation Resistance: 5000 megohm @ 500 VDC
Temperature Range: -65°C to +125°C

Withstanding Voltage: 1000 VRMS @ 60 Hz


Terminal Material: Brass except styles -M, -N, -P and -Q are Phosphor Bronze

Plating: Au over 50µ" Ni or Sn over 100µ" Cu or 50µ" Ni

Current Rating: 1 amp continuous @ 100 VDC per contact

Terminal Retention in Body: 5 lbs. against barb


Note: Some sizes, styles and options are non-standard, non-returnable.

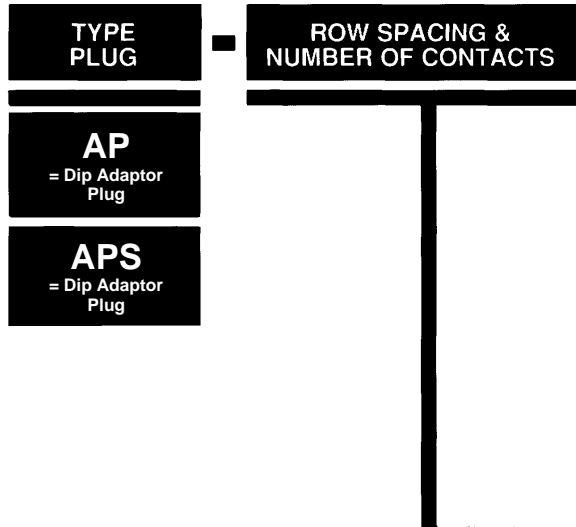

- 306 = .300 Row 06 Contacts
- 308 = .300 Row 08 Contacts
- 310 = .300 Row 10 Contacts


Part No.	A Length	B Width
AP or APS-306	(8,89),350	(10,16),400
AP or APS-308	(11,43),450	(10,16),400
*AP or *APS-310	(13,97),550	(10,16),400

* Mounting hole off center on 10 position.




- 314 = .300 Row 14 Contacts
- 316 = .300 Row 16 Contacts
- 318 = .300 Row 18 Contacts
- 320 = .300 Row 20 Contacts
- 324 = .300 Row 24 Contacts
- 422 = .400 Row 22 Contacts
- 424 = .400 Row 24 Contacts


Part No.	A LENGTH	B WIDTH	E MNT HOLES
AP or APS-314	(17,78),700	(10,16),400	(10,16),400
AP or APS-316	(20,32),800	(10,16),400	(12,70),500
AP or APS-318	(22,86),900	(10,16),400	(15,24),600
AP or APS-320	(25,40),1,000	(10,16),400	(17,78),700
AP or APS-324	(30,48),1,200	(10,16),400	(22,86),900
AP or APS-422	(27,94),1,100	(10,16),400	(20,32),800
AP-424	(30,48),1,200	(12,70),500	(22,86),900

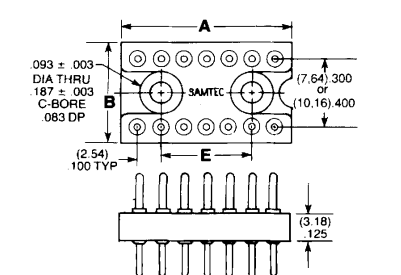

- 610 = .600 Row 10 Contacts
- 614 = .600 Row 14 Contacts
- 616 = .600 Row 16 Contacts
- 618 = .600 Row 18 Contacts

Part No.	A Length
AP-610	(12,70),500
AP-614	(17,78),700
AP-616	(20,32),800
AP-618	(22,86),900



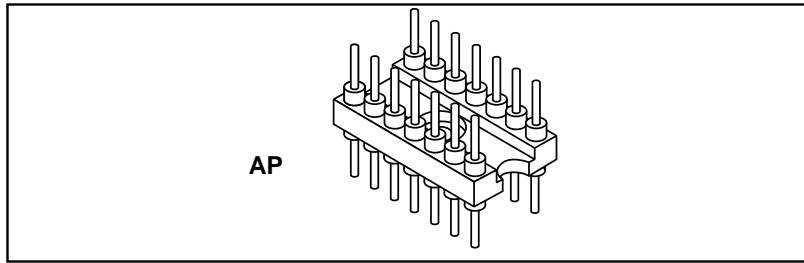

AP & APS SERIES

PLATING OPTION

-G
= 20μ" Gold

-T
= 200μ" Tin

STYLE OPTION

-A or -A1
= Round Pin

STYLE	X DIA
-A	(0.64) / .025
-A1	(0.46) / .018

Style A Component No. = T-1R0-
Style A1 Component No. = T-1R5-

-B
= Solder Pot

Component No. = T-1R1-

-C
= Slotted Head

Component No. = T-1R2-

- 624 = .600 Row 24 Contacts
- 628 = .600 Row 28 Contacts
- 632 = .600 Row 32 Contacts
- 640 = .600 Row 40 Contacts
- 940 = .900 Row 40 Contacts
- 950 = .900 Row 50 Contacts
- 964 = .900 Row 64 Contacts

-D
= Wire-Wrap

Component No. = T-1S4-1-1


-E
= Slot-head W.W.
(-648 N/A)

Component No. = T-1S5-

-F
= Flat-head W.W.

Component No. = T-1S2-

PART NO.	A LENGTH	B WIDTH
AP or APS-624	(30.48)1.200	(17.78).700
AP or APS-628	(35.56)1.400	(17.78).700
AP or APS-632	(40.64)1.600	(17.78).700
AP or APS-640	(50.80)2.000	(17.78).700
*AP-940	(63.50)2.500	(26.27)1.050
†AP-950	(63.50)2.500	
AP-964	(81.28)3.200	



*AP-940 and AP-950 are non-standard non-returnable.
† Mounting hole off center on 50 positions

-J
= Solder Shell

Component No. = S-1P1-

-K
= Test Point

Component No. = T-1R15-

-M, -N, -P or -Q
= Interconnect Post

STYLE	Y
-M	(1.52) .060
-N	(4.67) .186
-P	(11.95) .435
-Q	(17.40) .685

Component No. = T-1R14-